


SPYDI


Instructions For Use Gebrauchsanweisung














eu@holystone.com (EU) au@holystone.com (AU)

English								01-60
•	 							
Deutsch								61-118

CONTENTS

Product Introduction

01	Package	Contents

- Diagram of the Drone
- Diagram of the Transmitter

Product Functions

Flight Functions

- APP Functions
- Stabilization Function
- Storage

Operation Guidance

)9	Charging

Pre-Flight Preparations

Flight Environment Requirements

General Information

Specifications

Contact Us

Trouble Shootings

Safety Instructions

Flight

Disclaimer & Warning Safety Guidelines

Pre-Flight Checklist

56 Maintenance

53

56 Recycle this Product

Compliance Information



1.1 Package Contents >>

























Drone

- 4 Drone Battery
 - - 7 Connection Cable (micro-USB)
 - 8 Connection Cable (lightning)
 - 9 Joysticks

- USB Charging Cable
- Screwdriver
- 12 Instructions For Use


2 Propellers 5 Transmitter




3 Camera Cover 6 Connection Cable (type-C)

STONE

1.2 Diagram of the Drone >>

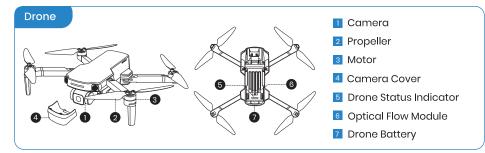

Battery of the Drone



Snap

- 3 Charging Port (Type-C)
- 2 Battery Level Indicators 4 Power Switch

On/Off: Turn the battery on/off by pressing the power switch for 3 seconds. When the battery is on, the battery level indicators will display the current battery status. When the battery is powered off, all the indicators are out.


© Equipped with a self-discharge protection, the battery, if left unused for more than 3 days post full-charge, will autonomously lower its charge to 70-75% to maintain its health.


01

1.3 Diagram of the Transmitter >>


Transmitter Functions

• Front:






Bottom:



Cellphone Holder **Z** Takeoff/Landing: Short Press Emergency Stop: Long Press GPS Switch on/off: Long Press 3 Left Joystick 4 Speed Switch: Short Press 5 Take Photo 6 LCD Screen 7 Check Battery Level: Short Press Power Switch: Short press, then hold 8 Right Joystick 9 Return to Home 10 Record Video III Zoom Dial 12 Connection Port 13 Camera Adjustment Dial 14 Cellphone Slot 15 Charging Port (Type-C) 16 Storage Slots for Joysticks

1.3 Diagram of the Transmitter >>

LCD Screen

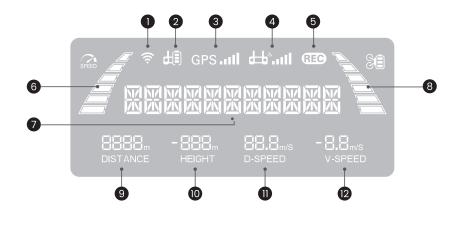


- Transmitter WiFi Signal 2 Transmitter Battery Level 3 GPS Signal Strength
- 4 Transmitter Signal Strength 5 Photo/Record Indicator 6 Flight Speed
- 7 Drone Status 8 Drone Battery Level 9 Flight Distance
- IIIFlight SpeedIIIAscend/Descend Speed

Mhen the battery level of the transmitter is low, its icon (deli) will start to flash. When this happens, please bring the drone down to the ground immediately and charge the transmitter.

1.3 Diagram of the Transmitter >>


Joystick Mode


• Mode 2: (Left joystick as the throttle joystick)

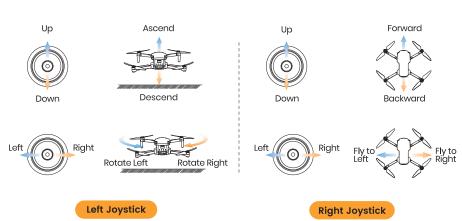

• Mode 1: (Right joystick as the throttle joystick)

Hold the () button, short press the () button of the transmitter once, then hold the latter until the transmitter quickly beeps 3 times. You will see "R HAND MODE" displayed on the LCD screen, which means the transmitter is now in Mode 1.

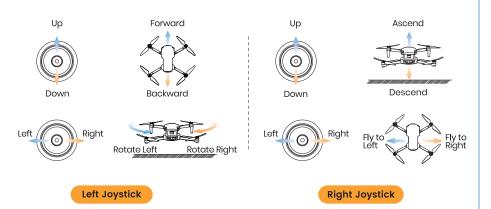

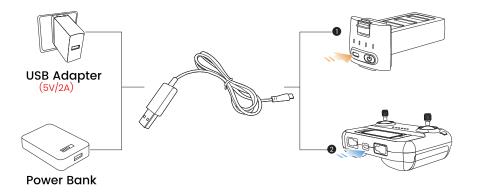

- ▲ Before charging, please read the instructions in the "Safety Guidelines" carefully.
 - · Please use the original charging cable to charge the drone battery and transmitter.
 - DO NOT charge the drone battery immediately after a flight as the temperature of the battery may be too high. Please wait until it cools down to room temperature before charging again.

Charging of the Drone Battery:

- 1 Insert the Type-C plug of the charging cable into the drone battery.
- Plug the other end of the cable into a USB adapter (5V/2A) or power bank to start charging.
- 3 When the battery is charging, the battery level indicators will keep flashing. When it is fully charged, all the indicators will be on.
- 4 It takes about 3 hours to fully charge a drone battery. A fully charged battery offers about 20 minutes of flight time.

Charging of the Transmitter:

- 1 Insert the Type-C plug of the charging cable into the Type-C port of the transmitter.
- Plug the other end of the cable into a USB adapter (5V/2A) or powerbank to start charging.
- 3) When charging, the cells in the battery level bar will light up in turn. The LCD screen displays "CHARGING." When the charging is done, all 3 cells will light up and the LCD screen displays "CHARGE DONE."
- 4 It takes about 2 hours to fully charge the transmitter. A fully charged transmitter offers about 2 hours of usage time.

09





2.2 Pre-Flight Preparations >>

① Download & Installation







Android APP on Google play

The drone is equipped with a Live-Feed function. Please scan the corresponding QR-code above, and download the "HS FLY" app to use the related functions.

Camera Cover







Gently pull the cover up, then pull it toward the front of the drone.

1 Please remove the camera cover before you turn on the drone.


2.2 Pre-Flight Preparations >>

③ Drone Battery



Installation:

Push the battery into the fuselage. Make sure you hear a click when inserting the battery, which indicates that it is installed firmly.



Remove:

Press down on the snap and **pull the battery out** of the fuselaae.



· Only install/remove the battery when it is powered off.

4 Arms

Unfold the front arms



Unfold the rear arms



All arms of the drone are folded when it is packaged at the factory. First, unfold the front arms, then unfold the rear arms.






2.2 Pre-Flight Preparations >>

⑤ Propeller

Installation:





Install the marked propellers to the marked motor shafts. Use the screwdriver to tighten the two screws in place. Install then the unmarked propellers to the unmarked motor shafts.

Remove:






Use the screwdriver to turn the screws anti-clockwise to remove them. Then pull the propellers up.



- The marked propellers have a different spin direction than the unmarked ones. So please ensure that they are installed to the right motor shafts.
 - Before each flight, check if the propellers are secure and tight.
 - If the propellers become deformed or damaged, please replace them before flying again.


2.2 Pre-Flight Preparations >>

6 TF Card



Insert a TF card (**not included**) into the TF card slot before turning on the drone. This drone supports TF card with a max storage of 128GB.

⑦ Joysticks



Take the joysticks out of the storage slot and mount them onto the transmitter.







Fly in Open Areas



Maintain Line of Sight



Fly Below 394 ft













Avoid flying over or near obstacles, crowds, high voltage power lines, trees, airports or bodies of water. Avoid flying near areas with magnetic or radio interference, including as power lines, mobile base stations, radar stations, and broadcasting towers. DO NOT use this drone at night.












O DO NOT use this drone in severe weather conditions including heavy wind, rain, snow, fog, hail, or lighting.

2.4 Pre-Flight Checklist >>




Make sure the transmitter, the cellphone and the drone battery are fully charged.



Make sure the drone battery and the propellers are installed securely.



Make sure the drone arms are fully expanded.



Make sure that there is nothing obstructing the motors.



Make sure the camera cover is removed.



Make sure you use HolyStone accessories






2.5 Flight >>

Pairing




- To avoid unnecessary loss or damage, it is strongly recommended that the pilot flys this drone in an open, outdoor area.
 - All of the operations shown in this manual are demonstrated using MODE 2.





1 Turning on the drone


Long press the power switch to turn on the drone Place it on a level surface with its **head pointing forward**. The drone status indicator starts to blink red. The drone is now waiting to be paired.



2 Turning on the transmitter

Short press the button once, then hold it to turn on the transmitter

Short pressing the button once will only display the battery level.



3 Auto-Pairing

It takes about 40 seconds to pair the transmitter with the drone. During the pairing, the transmitter will keep on beeping. Finally, it will long beep once, indicating that the pairing is complete.





2.5 Flight >>

App Connection

1 Cellphone connection: Pull out the phone holder. Select the appropriate connection cable (Type-C, Micro-USB, or Lightning) from the package. Connect the end marked with a transmitter icon () to the transmitter and plug the other end into your cellphone.



2 Run the "HS FLY" app and open up the live-feed interface.



When using an Android phone, please choose "charge only" when the cellphone asks you to choose a connection mode. Other options may cause the connection to fail.

2.5 Flight >>

Compass Calibration



STEP 1

Push both joysticks towards the inner, upper corners simultaneously to start the compass calibration.



STEP 2

Rotate the drone horizontally (keeping it parallel to the floor) until the transmitter beeps once.



STEP 3

Point the head of the drone **upward and rotate it** till the transmitter beeps again, and the drone indicator turns solid blue. The compass calibration is complete.

2.5 Flight >>

Unlocking the Motors

Unlocking



Push both of the joysticks simultaneously toward the inner. lower corners. The motors start to spin, the drone is unlocked.

Quality Locking: If no command is given, the motors will lock themselves automatically 20s after the they are unlocked. You can also push both of the joysticks to the inner corners to manually lock them.

Takeoff/Landing





Takeoff Short press the (♠) button, the drone slowly takes off. You can control the drone with the joysticks now.

Landing When the drone is in the air, short press the (<u>↑</u>) button. The drone slowly descends to the ground.

1 In places with weak GPS reception, the drone indicator will keep flashing blue slowly. If you want it to take off, you can hold the (\bigcirc) on the transmitter for 2 seconds to exit the GPS mode. The drone indicator will flash blue quickly, the LCD screen displays "ATTI MODE," the drone goes into attitude mode, it can take off, but all the GPS-related functions are unavailable now.



Camera Adjustment



Adjust the camera angle by scrolling the camera adjustment dial (@ANGLE @) (tilt range: -90°~0°)


Zoom



To zoom in, scroll the zoom dial (-\subseteq+) to the right. The LCD screen displays "ZOOM IN."

3.1 Flight Functions >>

Emergency Stop

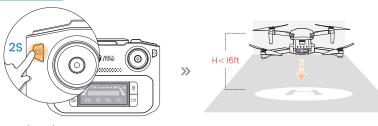

Hold the (🏥) button for 2 seconds to use Emergency Stop. This function only works when the drone's altitude is lower than 16ft.

Mhen the Emergency Stop is triggered, the propellers will immediately stop spinning, and the drone will lose control, falling freely from its current height. This could potentially hit people or anything in surrounding, leading to injury or damage to valuable items.

The Emergency Stop should only be triggered in emergency situations to minimize risk and reduce damage. Emergency situations include, but are not limited to: the drone losing control and colliding with people or animals or items, hair or other objects becoming entangled in the propellers, or the drone posing a threat to the safety of other aircraft, where immediate flight cessation or an immediate stop of the propellers is required.



Speed Switch



Short press the () button once to switch speed. The Camera Mode is 3m/s. The Normal Mode is 5m/s. The Sport Mode is 7m/s.

The normal mode is the default setting.

Low:



The transmitter beeps once. The LCD screen displays "CAMERA MODE"(💋).

Middle



The transmitter beeps twice. The LCD screen displays "NORMAL MODE" (🚪).

High:



The transmitter beeps 3 times. The LCD screen displays "SPORT MODE" (💆).

3.1 Flight Functions >>

Photo/Video



- Short press the () button on the transmitter. The (REC) on the LCD screen flashes once, which means that you have successfully taken a photo.
- Short press the () button on the transmitter. The (REC) on the LCD screen starts to blink, which means the camera is recording. Short press the button again will stop video recording.
 - During the recording, the "Take Photo" function is disabled.



GPS Return to Home

The GPS Return to Home (RTH) function brings the drone back to the home point. As the name indicated, this function can only be triggered when the drone is in GPS mode.

There are 3 types of RTH: Smart RTH, Failsafe RTH and Low Voltage RTH.


* RA: the Return Altitude set in the app setting.

1 Smart RTH:

Short press the (<u>O</u>) button to activate Smart RTH. The drone will fly back to the last recorded Home Point.

During Smart RTH, the transmitter will keep on beeping. Short press the ($\underline{\underline{0}}$) button again to exit Smart RTH.






2 Failsafe RTH:

If the transmitter loses the connection with the drone, the transmitter will emit continuous beeps. The Failsafe RTH will be automatically triggered. The drone will fly back to the last recorded Home Point.

During Failsafe RTH, the drone will try to re-establish connection with the transmitter. Once the connection is re-established, the pilot can manually end the RTH procedure by pressing the (\bigcirc) button again, thus regaining control of the drone.

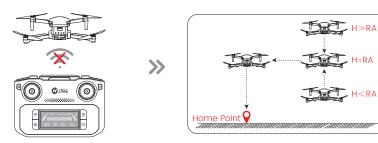

GPS Return to Home



3 Low Voltage RTH

To ensure safety and prevent risks associated with low battery power, the drone is equipped with a Low Voltage RTH function. This feature activates automatically when the drone's battery level drops. Depending on the remaining battery power, there are two return phases:

The First Phase:

- · The transmitter emits a continuous beep.
- The LCD screen displays "GOING HOME."
- · The drone automatically flies back and hover over the Home Point,
- · Upon activation of the first stage of Low Voltage RTH, a "safety zone" is established. This zone has a height of 66 ft and a radius of 98 ft, centered around the Home Point. Once the drone returns and hovers within this airspace above the Home Point, completing the RTH procedure, it remains restricted to flying within the safety zone.


The Second Phase:

- · The transmitter emits prolonged beeps.
- · The LCD screen continues to display "GOING HOME," and the battery level indicator flashes.
- · The drone returns directly to the Home Point and initiates an automatic landing.



- 🔼 · The drone does not have an automatic obstacle avoidance feature. Be cautious during the return flight as collisions with obstacles could result in a crash.
 - · Always keep the transmitter ON during flights. Turning it off will trigger the Failsafe RTH due to a lost connection.



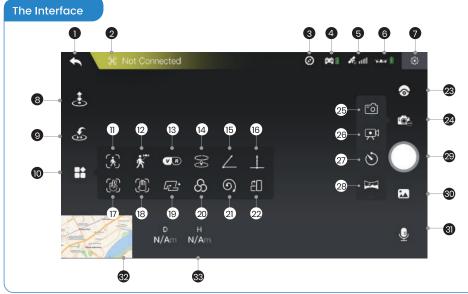

- Homepage (♠): Tap this icon to return to the main menu.
- 2 System Status (K Not Connected): Displays the flight status and various warning messages.
- Interference Index of Compass (②): Displays the current level of electromagnetic interference. "0" means no interference, "1000" means max. interference.
- 4 Transmitter Battery Level (): Real-time display of the current battery level of the transmitter.
- 5 GPS Signal (ill): Displays current GPS signal strength.
- 6 Drone Battery Level (Real-time display of the current battery level of the drone.
- 7 Settings (← Tap to enter the setting interface. Alter settings for flight height/distance, return altitude, etc.
- 8 Takeoff/Landing (🕹): Tap the icon, follow the instructions in the prompt box to takeoff/land.
- Multi-functions ()
- Image Follow (﴿): After selecting a target, the camera will always point towards it no matter how the target moves. The position of the drone in the air remains unchanged. (The target should not move too fast.)





3.2 APP Functions >>

The Interface

- © GPS Follow (): The drone stays at a distance from the operator and follows the GPS position of the paired mobile phone (See page 37).
- 13 VR Screen-Split (VP): Pair the mobile phone with a pair of VR glasses (not included) first. Then use this function to watch 3D live feed in real-time.
- Point of Interest (>>): The drone flies around a point (See page 39).
- Catapult (__): The drone flies backward and ascends, with the camera locked on the subject. A video is made during this (See page 40).
- One-key Ascension (in the drone ascends with the camera locked on the subject. A video is made during this (See page 41).
- Gesture Selfie (): When in this mode, you can trigger the shutter of the drone camera by holding a "v" -sign near your face. (The drone camera should be pointing to your face.)
- When in this mode, you can trigger the shutter of the drone camera by holding your palm near your face. (The drone camera should be pointing to your face.)
- TapFly (الرَّبِّة): The drone flies along the flight path you draw on the screen of the mobile phone (See page 42).
- 20 Camera Filter (🖒)

- 21 Spiral Up ((5)): The drone ascends and spiral around the subject. A video is made during this (See page 43).
- Portrait ([]): The shooting mode will turn from landscape to portrait.
- 23 Adjustment (): You can zoom in/out and adjust the camera angle here.
- 24 Shooting Mode () Take Photo (): Tap to use the photo function.
- 26 Record Video (): Tap to use the record function.
- Time-lapse (): Tap to use time-lapse shooting (See page 44).
- 28 Panorama (): Tap to use the Panorama function (See page 45).
- 29 Shutter (/)
- 30 Album (): Tap to preview photos and videos taken by the drone camera.
- 3 Voice Recording (): Record sounds and voices with your mobile phone while shooting videos.
- 22 Map (; Tap the Mini Map to switch between Camera View and Map View.
- Flight Distance (N/Am): Horizontal distance from the Home Point.

 Flight Altitude (N/Am): Vertical distance from the Home Point.




Flight Settings

On APP

Beginner Mode

The beginner mode is the default operating mode. When in the Beginner mode:

- 1 The flight distance can not exceed 98 ft.
- 2 The flight altitude can not exceed 98 ft.
- 3 The return altitude during RTH is 66ft.



If you want to alter the above-mentioned parameters, please first turn off the beginner mode. You can go to the "Settings" to modify these parameters.



Flight Settings On APP

Remove the distance limit:

After removing the distance limit, the maximum flight distance is extended to 300 If the battery is low, and the drone is too far away, the drone may not be able to fly back to the home point. So please be extra careful when you turn on this function.


If you want to get a longer flight distance, you can activate the "Remove Distance Limit" function in the "Settings" and boost the max flight distance up to 9842 ft.

1 Please be cautious when removing the distance limit. If the battery of the drone is low, the drone may not be able to fly back to the Home Point!

GPS Follow

When the GPS Follow function is enabled, the drone will track your movement by following the GPS signal on your cellphone. (Please make sure that the connection between the drone and the transmitter is strong and stable.)






- 1 Make sure that the drone's flight distance is within 164 ft. Tap the (👪) icon first, then select the (🧩) icon.
- 2 Follow the prompt box to enter the GPS Follow function the drone will now follow your cellphone's coordinates.
- 3 To exit GPS Follow function, simply tap the () icon on the app interface again.
- 164 ft. The GPS Follow function can only be used if the flight distance is within 164 ft.
 - · Follow Me function may be difficult to activate if the mobile phone's GPS signal is too weak. This could be caused by signal interference from surrounding buildings, trees, mobile network congestion etc.
 - · Please use this function in an open area and be mindful of your surroundings. The drone is NOT equipped with obstacle avoidance.
 - · The follow speed is 5 m/s.

Point of Interest





1 Tap the () icon first, then select the () icon, and follow the prompt box to activate the Point of Interest function. You can set the circling radius in the prompt box.


>>


- 2 The moment you activate this function, the drone will record its current flight position as the "point of interest". It will then continuously circle around that point clockwise. (default radius: 16 ft)
- 3 To exit Point of Interest mode, simply tap the () icon again.

3.2 APP Functions >>

Catapult








- 1 Make sure that the drone is a least 7 ft away from the target. Adjust the camera angle so it points directly to the target.
- 2 Tap the () icon, then tap (). Swipe in the prompt box to confirm.
- 3 The drone will automatically start recording, while flying about 82 ft away from the target.
- 4 After this, it will fly back to the starting point.
- **5** Tap the (\angle) icon again, or push the right joystick to exit this function.
- ⚠ Make sure there is no obstacles or people in the flight path of the drone. In case of emergency, push the right joystick to exit Catapult.

3.2 APP Functions >>

One-key Ascension







- 1) Please make sure that the drone is a least 7 ft away from the target. Adjust the camera angle so it points directly to the target.
- 2 Tap the () icon, then tap (). Swipe in the prompt box to confirm.
- 3 The drone will automatically start recording and ascend to 49 ft.
- 4 After this, the drone will fly back to the starting point.
- 5 Tap the (1) icon again, or push the right joystick to exit this function.
- ⚠ Make sure there is no obstacles or people in the flight path of the drone. In case of emergency, push the right joystick to exit One-key Ascension.

3.2 APP Functions >>

TapFly

When using the TapFly, it is recommended to enlarge the map before drawing the flight path.



- 1 Tap the (♣) icon, then Tap (♣.).
- You can tap a dozen of times (but no more than 16) on the phone screen to create a flight path. Hit "GO" to submit the route. The drone will then fly along the path created by connecting the points you tap in order.
- 3 You can exit TapFly by tapping the ([]) icon again, or pushing the right joystick in any direction.



- DO NOT fly the drone towards people, animals, or small/thin objects (e.g. tree branches and power lines) or transparent objects (e.g. glass or water).
- · The actual flight path and the path you draw may not align perfectly.







3.2 APP Functions >>

Spiral Up







- 1 Make sure that the drone is about 16 ft away from the target. Adjust the camera angle so it points directly to the target.
- 2 Tap the () icon, then tap () . Swipe in the prompt box to confirm.
- 3 The drone will automatically ascend and circle around (max. radius: about 49 ft) and start recording.
- 4 After this, it will fly back to the starting point.
- **5** Tap the (**o**) icon again, or push the right joystick to exit this function.

⚠ Make sure there is no obstacles or people in the flight path of the drone. In case of emergency, push the right joystick to exit Spiral Up.

3.2 APP Functions >>

Time-lapse






- 1 Tap the (🙉) icon, then tap (🔌) to use time-lapse shooting.
- 2 Swipe to choose the video playback speed, tap again to confirm.
- 3 Tap the shutter (), the time-lapse shooting begins.
- 4 Tap the shutter () again to stop recording.





Panorama






- 1 Tap the () icon, then tap () to use the Panorama function.
- 2 Tap the shutter ().
- 3 The drone will maintain its current position and rotate. A panorama picture is then auto-generated and saved to the album. A prompt box will pop up when this is done.

3.3 Stabilization Function >>

Optical Flow Positioning



The Optical Flow Positioning System consists of a camera module, which acquires the position information of the drone through visual images to ensure precise positioning of the drone.



The Optical Flow Positioning System is typically used in an indoor environment when GPS signal is weak or unavailable. It works best when the drone altitude is less than 10 ft.



- · The optical flow positioning system works best when the drone's altitude is less than 10 ft.
- Flying speed should be controlled not to be too fast. When the drone is 3 ft from the ground, the flying speed should not be over 16 ft/s. When the drone is 7 ft from the ground, the flying speed should not be over 33 ft/s.

3.3 Stabilization Function >>

Optical Flow Positioning

The precision of the Optical Flow Positioning System is easily affected by the light intensity and features of the surface textures. Once the image sensor is not working properly, your drone will switch to altitude-hold function automatically. Please be cautious to operate the drone in the following situation:

- 1) Fly fast at an altitude below 2 ft.
- 2 Fly over monochrome surfaces (e.g., pure black, pure red and pure green).
- 3 Fly over highly light reflective surfaces.
- 4 Fly over water or transparent surfaces.
- 5 Fly over moving surfaces or objects.
- 6 Fly in an area where the lighting changes dramatically and frequently.
- 7 Fly over extremely dark (<10 lux) or bright (>10,000 lux) surfaces.
- 8 Fly over surfaces without clear patterns or textures.
- 9 Fly over surfaces with highly repeating textures (small grid brick in the same color).



3.3 Stabilization Function >>

Altitude-Hold Function



The drone is designed with an altitude-hold function to maintain its altitude after releasing the left joystick. (The left joystick will automatically spring back to the middle)

3.4 Storage >>

- 1 If no TF card is inserted, the photos and videos will be saved to the APP album and the gallery of your cellphone.
- 2 If a TF card is inserted, the photos and videos will be saved to the APP album and the TF card.
- If you want to view the photos and videos through the app, please make sure that the drone, the transmitter and the cellphone are properly connected.



STONE

4.1 Specifications >>

DRONE:

Model: HS360S	Weight : 249 g/8.78 oz		
Max Flight Time : 20 minutes (per battery) (in a windless environment)	Operating Temperature Range :32° to 104°F		
Size: 141*94*56 mm (folded) 297*215*56	mm (unfolded)		
Max Wind Speed Resistance: 5.5m/s	Max Takeoff Altitude: 9842 ft/3000m		
Max Flight Speed: 7m/s			

DRONE BATTERY:

Model: DS903462-2S	Capacity: 1500mAh
Voltage: 7.4V	Max Charging Voltage: 8.4V
Rated Power : 11.1 Wh	Battery Type : Lithium-ion Polymer Battery
Charging Temperature Range : 41° to 104°F	Charging Time : about 3 hours

• USB CHARGING CABLE :

Input: 5V/2A	Rated Power: ≤10 W

4.1 Specifications >>

• TRANSMITTER:

Operating Frequency : 5745-5825MHz	Charging Time : about 2 hours
Max Flight Distance : 9842 ft (outdoor and unobstructed)	Usage Time : about 2 hours
Battery Type : 3.7V 1500mAh	Operating Temperature Range : 32° to 104°F

CAMERA:

Max Photo Resolution : 3840×2160P (in TF card) 3840×2160P (in mobile phone) Max Video Resolution : 3840×2160P@20fps (in TF card) 1280x720P@20fps (in mobile phone) Max Transmission Distance : 9842 ft (outdoor and unobstructed) Video Formats: AVI/MP4 File Systems: FAT32	Operating Frequency : 5745-5825 MHz	Lens Angle : FOV 85°
Max Transmission Distance : 9842 ft (outdoor and unobstructed)	Max Photo Resolution : 3840×2160P (in TF carc) 3840×2160P (in mobile phone)
(outdoor and unobstructed)	Max Video Resolution : 3840×2160P@20fps (in	TF card) 1280x720P@20fps (in mobile phone)
Video Formats: AVI/MP4 File Systems: FAT32		Photo Formats: JPEG
	Video Formats: AVI/MP4	File Systems: FAT32
Supported TF Cards: Class 10 or above TF Card with storage up to 128 GB (not included)	Supported TF Cards : Class 10 or above TF Car	d with storage up to 128 GB (not included)

4.2 Contact Us >>

Please do not hesitate to contact us if you need further support.

usa@holystone.com (America) ca@holystone.com (Canada) eu@holystone.com (Europe) au@holystone.com (Australia)



+1 (833) 766-4733



www.holystone.com



4.3 Troubleshootings >>

Issue	Possible Causes	Suggested Solutions
	Weak GPS signal.	l. Ensure you're operating in an area with strong GPS reception. 2. For indoor operations, long-press the speed switch button to transition to Altitude-hold Function. (See Page 22 in the user manua
Motors won't	The drone's battery is running low(as indicated by a continuous red light on the drone).	
start.	The compass isn't calibrated (evidenced by the continuous flashing of red and blue lights on the drone's underside)	
	The left and right joysticks were not properly positioned during the unlocking process.	Push both joysticks simultaneously to the 5 o'clock and 7 o'clock positions, holding for 2 seconds.
	GPS signal instability due to flying near buildings or in areas with obstructions.	Operate the drone in open spaces free from obstructions.
Unstable flight or abnormal posture.	Compass interference	Manually land the drone immediately and recalibrate the compass. Try operating in a different location, ensuring you're away from buildings, power lines, and signal towers.
	Propeller deformation or damage.	Replace with new propellers.
Video lag	Interference with the video transmission signal.	Operate the drone in open areas away from potential obstructions like buildings, power lines, and towers to minimize interference.
or limited	The transmitter and mobile device are not oriented towards the drone.	Ensure the transmitter and mobile device are facing the drone's direction to optimize signal strength.
transmis- sion range	Overly rapid joystick movements during flight control.	Use gentle, steady joystick movements during flight. In the app settings, switch to a higher frame rate resolution.
	Phone performance issues.	Close any unused apps running in the background to optimize you phone's performance.

5.1 Disclaimer & Warning >>

- Please read this Disclaimer & Warning and Safety Guidelines carefully before using our product. By using this product, you hereby agree to this disclaimer and signify that you have read it fully. You agree that you are responsible for your own conduct and any damage caused while using this product, and any consequence. You agree to only use this product for it's designed purposes and in accordance with the local laws, regulations and all applicable policies and guidelines that HolyStone may provide.
- When using this product, please be sure to strictly abide by the specification requirements and safety
 guidelines stated in this document. Any personal injury, property damage, legal disputes and all other
 adverse events caused by the violation of any of the safety instructions or due to any other factor,
 WILL NOT be HolyStone's responsibility.

5.2 Safety Guidelines >>

- This product is a high precision drone that integrates various electronic stability and control mechanisms. Please be sure to configure this drone carefully and correctly to ensure safe, accident-free operation.
- Ensure that the batteries of the drone and transmitter are clean, undamaged, and fully charged before every use.
- Ensure that all the propellers are undamaged and are installed in the correct orientation.
- Please perform a thorough check of the product before each use. If there is any problem found after checking the drone, please refrain from using it until the problem is resolved.

- DO NOT use this product to follow any moving vehicles.
- During the flight, turn off the motors only in case of an emergency.
- When the battery runs low, return the drone back to your starting point.
- DO NOT use this product if you feel unwell, tired, or are under the influence of alcohol or drugs.
- Be aware of the volume of noise that the drone produces. Please ensure to keep your distance to avoid ear damage.
- Stay away from the rotating propellers and motors.
- DO NOT fly in any spaces where the drone are prohibited. Please respect people's right to privacy by not flying your drone close to others.
- DO NOT answer incoming calls, text messages, or do anything that may distract you from operating
 your smart device to control the drone during flight.
- To ensure safety and airworthiness, refrain from attaching any unauthorized items or devices to the aircraft.

Battery Usage:

- Always check the battery's condition before charging or using it.
- DO NOT crush or squeeze the batteries as this could cause the risk of fire or explosion.
- DO NOT mix new and old batteries, as this can lead to poor product performance.
- If the device is not going to be used for an extended period of time, please remove the batteries to prevent potential damage to the drone from battery leakage.
- DO NOT attempt to disassemble or modify the battery in any way.
- DO NOT use the battery if it gives off an odor, generates heat, becomes discolored, deformed, or appears abnormal in any way. If any of these situations occur while the battery is in use or being charged, remove it immediately from the device or charger and discontinue its use.
- DO NOT immerse the battery in water or get it wet.
- DO NOT solder the battery terminal in any way.
- Never leave the battery unattended during the charging process.



- DO NOT short-circuit the battery by connecting wires or any other metal object to the positive(+) and negative(-) terminals.
- Failure to follow all the instructions may result in severe injury, irreparable damage to the battery, and cause a fire, smoke, or explosion.
- While charging, place the battery on a non-flammable and non-conductive surface, ensuring it's distanced from any combustible materials. Do not charge the battery on flammable surfaces, including (but not limited to) wooden tables, fabrics, and carpets.
- This toy should only be connected to the equipment with symbol Class II.



Battery Storage:

- Keep batteries out of reach of children or pets.
- Never expose the LiPo battery to source of moisture or direct sunlight or store it in a place where temperatures could exceed 60°C.
- Please keep the packaging as it contains important information.

Battery Disposal:

- DO NOT expose dead batteries to heat or fire, or they may explode.
- Please dispose of used batteries carefully. Used batteries should be brought to specialized battery
 recyclers, participating retailers that provide battery takeback services or local household hazardous
 waste collection programs.



Li-Po Battery Disposal & Recycling

Waste Lithium-polymer batteries must not be placed with household trash.

Please contact local environmental or waste agency or the waste agency or the supplier of your model or your nearest Li-Po battery recycling center.



5.3 Maintenance >>

- Clean the drone after each use with a clean, soft cloth.
- Avoid prolonged exposure to direct sunlight and avoid buildup of heat on the drone or batteries.
- This device is not waterproof. DO NOT allow it to get wet or submerged in water. Failure to keep the
 device completely dry will result in the failure and permanent damage to the unit. Be aware that
 although it might be dry where you are, droplets of rain or mist from a river or waterfall could
 damage your drone while it is flying.
- Frequently check the charging plug and other accessories for signs of damage. If any part of the device or cables are damaged, avoid use or charging until the damaged part is replaced.

5.4 Recycle This Product >>

- This symbol on the product or its documentation indicates that it must not be disposed of with household waste
- Uncontrolled waste disposal may harm the environment or human health.
- Please separate your device from other types of waste to recycle it responsibly. This will help to
 foster the sustainable re-use of material resources.
- We invite you to contact your retailer or inquire at your local town hall to find out where and how the drone can be recycled.



55

FCC Notice

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

The Supplier's Declaration of Conformity is available at the following address:

https://www.holvstone.com/Download/US/HS360S_FCC_sDoC.pdf

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure:

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This device should be installed and operated with minimum distance 20cm between the radiator & your body. This part belonas to the drone.

This equipment complies with FCC/ISED radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmier must not be co-located or operating in conjunction with any other antenna or transmier.

The portable device is designed to meet the requirements for exposure to radio waves established by the FCC/ISED. These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue.

IC Notice:

This device is restricted to indoor use when operating in the 5150 to 5250 MHz frequency range.

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

CAN ICES-003 (B):

Avis d' Industrie Canada

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

CAN NMB-003 (B):

RF Exposure

Radiation Exposure Statement:

The device is compliance with RF exposure quidelines, users can obtain Canadian information on RF exposure and compliance. The minimum distance from body to use the device is 20cm.

Le présent appareil est conforme

Après examen de ce matériel aux conformité ou aux limites d'intensité de champ RF, les utilisateurs peuvent sur l'exposition aux radiofréquences et compliance d'acquérir les informations correspondantes. La distance minimale du corps à utiliser le dispositif est de 20cm.

EU RF Power (EIRP): <12 dBm (5745-5825MHz)

Caution:

The max operating of the EUT is 40°C. and shouldn't be lower than 0°C.

The device complies with RF specifications when the device used at 0mm from your body.

Declaration of Conformity.

We, Xiamen Huoshiauan Import & Export CO.,LTD hereby, declare that the UAS HS360S is of class C0, and in compliance with the RED Directive 2014/53/EU, the RoHS Directive 2011/65/EU, Toy Directive 2009/48/EC and UAS Delegated Regulation 2019/945/EU amended by Delegated Regulation 2020/1058/EU.

The full EU declaration of conformity is accessible at the following website:

http://www.holystone.com/Download/CE/HS360S_EU_DOC.pdf

This product can be used amona EU member states.

Manufacturer Information:

Manufactured by Xiamen Huoshiauan Import & Export CO.LTD

Address: Unit 1, Room 501, Honaxiana Buildina, No.258 Hubin Nan Road, Simina District, Xiamen, China

+1 (833) 766-4733

MTOM Statement

HS360S is a quadrotor drone. The MTOM of HS360S is 249 g, including the propellers, the Flight Battery and TF card, which is compliant with C0 requirements.

Users must follow the instructions below to comply with the MTOM C0 requirements. Otherwise, the drone cannot be used as a C0 aircraft:

1. DO NOT add any payload to the aircraft except the items listed in the List of Items including qualified accessories section.

2. DO NOT use any non-qualified replacement parts, such as flight batteries or propellers, etc.

3. DO NOT retrofit the aircraft.

List of Items including qualified accessories

1. HS360S Propellers (Model: HS360S-FY, 1.5 g each propeller, 4250rpm)

2. HS360S Flight Battery (approx. 73 g)

3. HS360S TF card (approx. 0.3 a)

List of Spare and Replacement Parts

1. HS360S Propellers (1.5 g each propeller) 2. HS360S Flight Battery (approx. 73 g)

MADE IN CHINA(CN)

List of Safe Guards

Below is the list of the mechanical safeguards and operation safeguards for HS360S.

1. Emergency Stop function can be performed to stop the motors in case of an emergency. Refer to the Emergen-

- cv Stop section for details.
- 2. The Return to Home (RTH) function. Refer to the GPS Return to Home section for details.
- 3. The Optical Flow Positioning. Refer to the Optical Flow Positioning section for details.
- 4. Prevent the drone from flying in restricted airspace. Refer to the Flight Environment Requirements section for

Similar products produced by the same manufacturer are electrically identical. Distinguish them based on product model and appearance color.

The firmware of toy product cannot be upgraded. In the future, new versions of the app will be released through the app store. Users can update the app by scanning the QR code in the instruction or searching "HS FLY" on the app store.